



100001-000C

Crawlair M

Mobile single-user filter unit for the filtration of dry dust.

Construction:

- radial fan 1,1 kW
- full mobility thanks to two swivel wheels
- two stages of filtration - metal prefilter, 2 x cartridge filter
- main filter regeneration system with manual control - requires connection to a compressed air system (5 - 5,5 bar)
- main filter clamping mechanism
- heavy duty welded and powder coated construction
- two dust drawers
- transport handle
- rubber mat

Parameters:

- nominal air flow: 1000 m³/h
- noise level dB(A)*: 73 dB(A)
- motor power: 1,1 kW
- max operating temp.: 45 °C
- weight: 110 kg

Filter cartridges:

- 240007 metal mesh filter Coarse 30% (G2)
- 243855 main filter cartridge dust class M

** For a 1 meter distance with extraction arm mounted and maximal airflow*

Notes:


Recommended fume arms:

- 101506 Oskar 1620P fume arm, reach 2m
- 101508 Oskar 1630P fume arm, reach 3m

Available accessories and options

- main filter regeneration system with time control

The method of packing and carton sizes:







A = 610
B = 1200
H = 1050
Weight = 120 kg

All dimensions are in mm

Menegon Sp. z o.o.
Mokry Dwór 6C, 83-021 Mokry Dwór, PL
tel: +48 58 301 28 38 info@menegon.com.pl
www.menegon.com.pl

All rights reserved. This document including constructional and technical information as well as trademarks and brand names are law protected and are property of Menegon Sp. z o.o. The producer reserves the right to introduce changes in construction without prior notification.

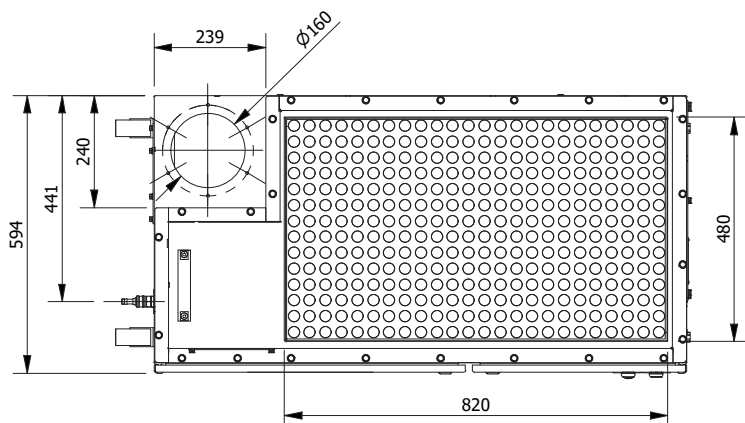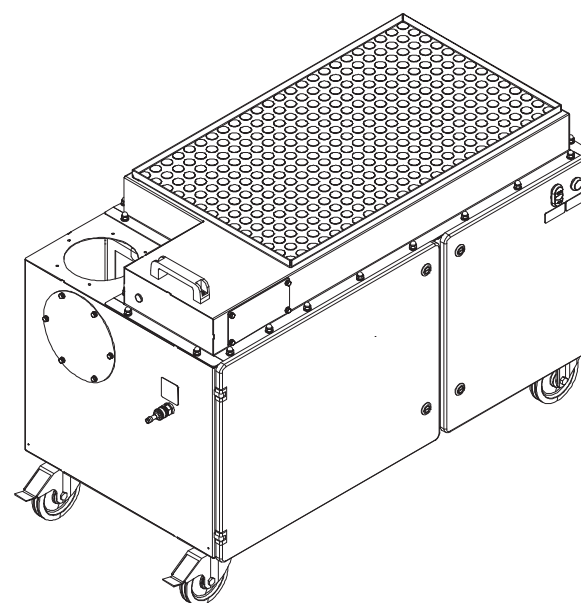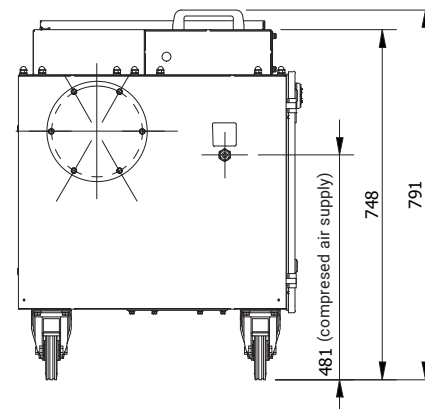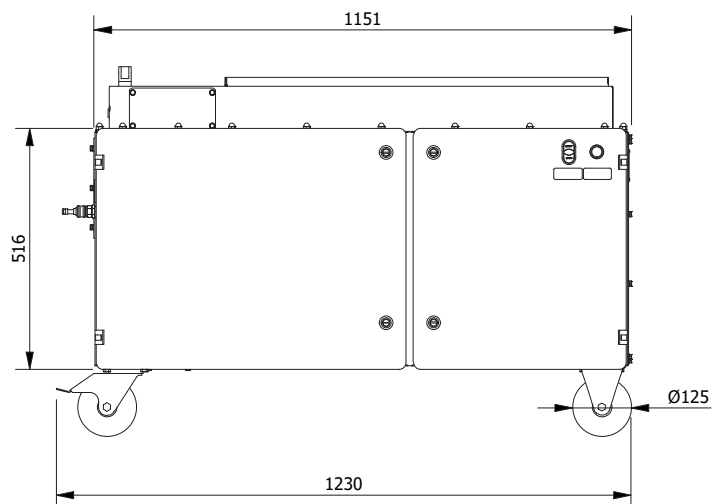

AVAILABLE CONFIGURATIONS OPTIONS

IDENTIFIER	ARM	ARM REACH	POWER SUPPLY
CRW-M-PCD-NOA	-	-	3~ 400V 50Hz
CRW-M-PCD-OC1620P	1 x Oskar 1620P	2	
CRW-M-PCD-OC1630P	1 x Oskar 1630P	3	