




Single inlet





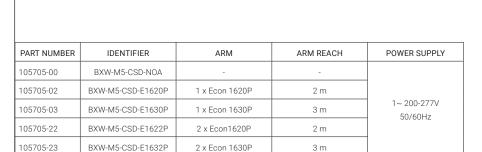



105705-00

Boxair BXW-M5-CSD

Mobile filter unit for welding fumes for sporadic use where there is no need of constant exhaust operation for one workstation.

Construction:

- high-performance composite impeller
- · electronically commutated motor
- adjustable air flow range full mobility thanks to two swivel wheels
- two stage filtration
- filter wear indicator
- heavy duty welded and powder coated construction
- filter sealing mechanism
- handles for transport

Parameters:

· range of air flow*: 0-1300 m³/h noise level dB(A)**: 70 · motor power: 0,78 kW 100 kg weight:

Filter cartridges:

- 1. 242207 metal mesh filter Coarse 30% (G2)
- 2. 242858 main filter ePM1 80% (F9)

A - inlet

B - outlet

* For single Ø160 inlet

** At 1 meter distance with extraction arm mounted and maximal airflow

Notes:

Recommended fume arms:

- 101534 ECON 1620P hose fume arm, reach 2m
- · 101536 ECON 1630P hose fume arm, reach 3m

Single inlet or double inlet depending on the ordered version oh the unit

The method of packing and carton sizes:



1200 800 B = 1100 H = Weight = 115 kg

All dimensions are in mm

Menegon Sp. z o.o. Mokry Dwór 6C, 83-021 Mokry Dwór, PL tel: +48 58 301 28 38 info@menegon.com.pl www.menegon.com.pl

All rights reserved. This document inlouding constructional and technical information as well as trademarks and brand names are law protected and are property of Menegon Sp. z o.o. The producer reserves the right to introduce changes in construction without prior notifictation.

-1/1-20250826