


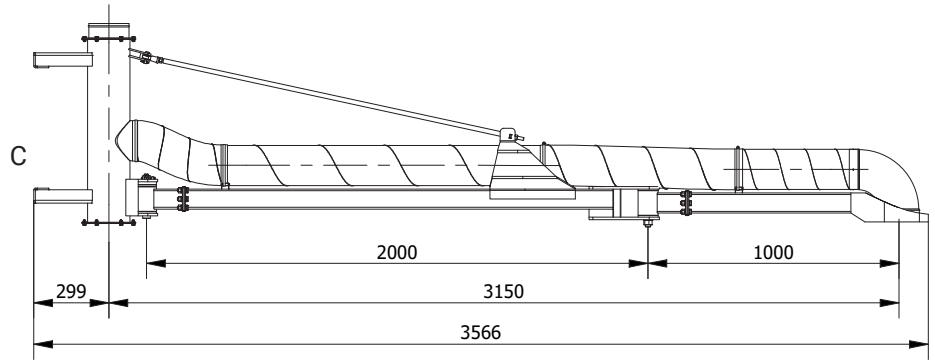




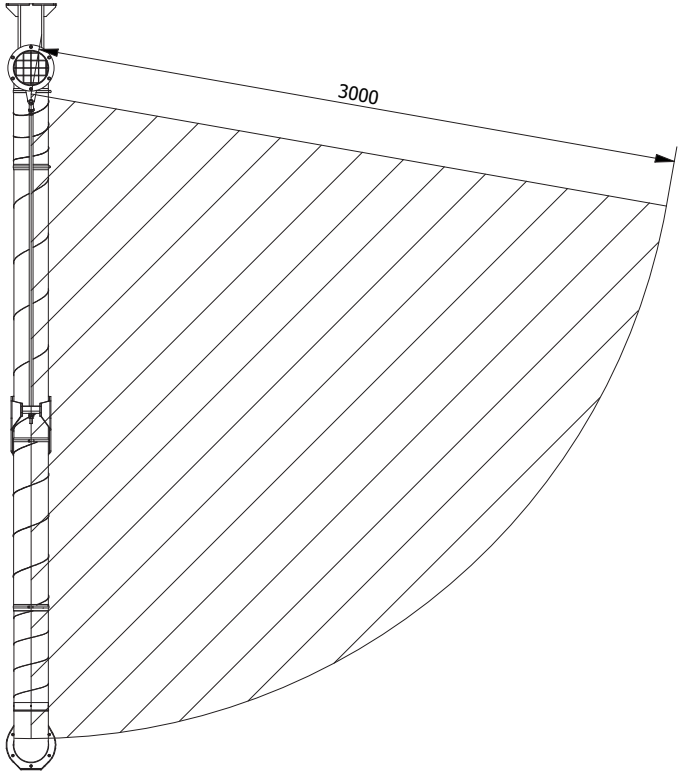

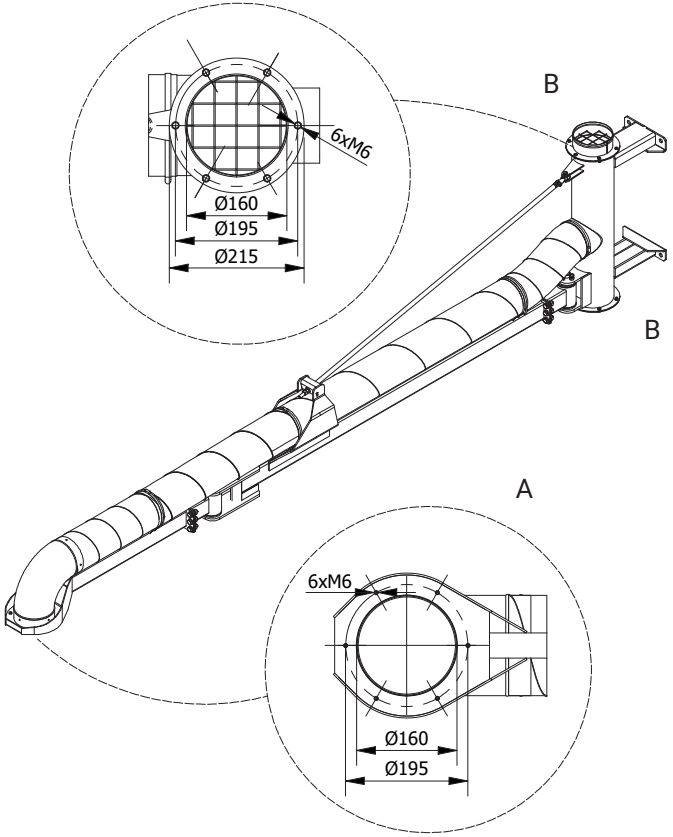

104658 WM2-21160

Dual-pivot modular rotary extension boom Ø160mm

Construction:

- galvanized spiral duct on the supporting beam
- heavy duty steel closed profile support beam with metal counter support rod and inlet socket for extraction arms or flexible hoses
- all supports and adjustments o the outside
- welded steel boom mounting bracket with top or bottom outlets
- boom based joint with friction liners
- black PVC flexible hose

Parameters:


• diameter:	160 mm
• reach:	3 m (2+1)
• max operating temperature:	80°C
• weight of extension boom:	95 kg

Notes:

A - inlet flange
B - outlet flange (top or bottom mounting)
C - mounting bracket

The extension booms are supplied as modules for self-assembly.

The method of packing and carton sizes:



A = 800;
B = 1200;
H = 2150;
Weight = 120 kg;

All dimensions are in mm

Menegon Sp. z o.o.
Mokry Dwór 6C, 83-021 Mokry Dwór, PL
tel: +48 58 301 28 38 info@menegon.com.pl
www.menegon.com.pl

All rights reserved. This document inlcuding constructional and technical information as well as trademarks and brand names are law protected and are property of Menegon Sp. z o.o. The producer reserves the right to introduce changes in construction without prior notifictation.